




## Rura Spiro

### RSR

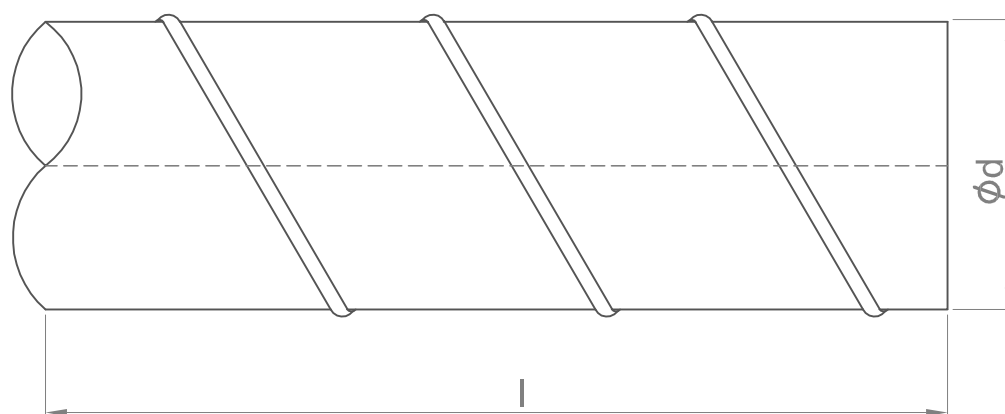

#### OPIS WYKONANIA :

Rura w standardzie jest wykonana w odcinkach  $L=3000$  mm.

#### OZNACZENIE: RSR / $\phi$ / l / mat.

Typ

Wymiar  $\phi$  [mm]

Długość

Standard  $l=3000$  mm

Materiał

Blacha ocynk - Galv-DX51D+Z275-M-A-CE wg EN 1034

Stal nierdzewna 1.4301(wg.PN-EN 10088)

$\phi d$ [mm]	Powierzchnia [m <sup>2</sup> ]	$\phi d$ [mm]	Powierzchnia [m <sup>2</sup> ]
80	0,251	400	1,257
100	0,314	450	1,414
125	0,393	500	1,571
160	0,503	560	1,759
180	0,565	630	1,979
200	0,628	710	2,231
225	0,707	800	2,513
250	0,785	900	2,827
280	0,880	1000	3,142
315	0,990	1120	3,519
355	1,115	1250	3,927